

- It sells automatic towel for reliable cleaning in cars and it works 24/7 long-term.
- It works with coins and gives the product to the user from the product reservoir of consistently the same quality car drying cloth.



Key Features

- LINK and Analogue/Pulse servo drives models
- High-response frequency of 1 kHz
- Auto-tuning for easy and quick start-up
- Vibration suppression
- Positioning, speed or torque control
- Separate power and control power supply
- Fast and accurate positioning
- Incremental and absolute encoder




Accessories



| Accessories          | Art. No.     | P. Qty |
|----------------------|--------------|--------|
| 230V Connector plug  | 0672 940 375 | 1      |
| Connection USB Cable | 0672 940 449 |        |

Floor Connection



Cross marked, the fixture of the assembly is fully attached to the ground point with 8 steel dowels.



HS CODE / NO / NUMBER : 84.76.89.00.00

| Electronic                                                                                                        |                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Nominal Voltage                                                                                                   | 12 V/DC                                                                                                         |
| IP Protection Class                                                                                               | IP67                                                                                                            |
| Work Temperature                                                                                                  | -15°C, +40°C                                                                                                    |
| Length x Width x Depth                                                                                            | 164 × 94 × 32 CM                                                                                                |
| Art. No.                                                                                                          | 0612023K                                                                                                        |
| P. Qt.                                                                                                            | 1                                                                                                               |
| Auto Range                                                                                                        | No                                                                                                              |
| Digital Sensor Reduction                                                                                          | DNR                                                                                                             |
| Included                                                                                                          | Power cable, Mounting Apparatus, Lock system, Balance bar                                                       |
|                                                                                                                   |                                                                                                                 |
| L.A. Length                                                                                                       | 20/40/80                                                                                                        |
| Payment Module                                                                                                    | Coin, token                                                                                                     |
|                                                                                                                   | RFID, NFC, Banknotes, coin and money return systems, credit card, smart card (Working without Money) (Optional) |
| Demist                                                                                                            | Optional electric demisting system                                                                              |
| Microprocessor                                                                                                    | High Performance Microprocessor EXECUTIVE Protocol Support                                                      |
| LOG                                                                                                               | Device cloning, statistics, software update and LOG retrieval feature with USB memory                           |
| LED                                                                                                               | High quality advertising space with LED lighting                                                                |
| Design                                                                                                            | Extra durability and locked cash box with robust design and high reliability locking mechanism                  |
| Material                                                                                                          | Corrosion-resistant Galvanized sheet Material and Electrostatic Powder Paint                                    |
| Test Equipment                                                                                                    | BITE (Built-in Test Equipment) problem detection and advanced error warning system.                             |
| Port                                                                                                              | RS485 port (IR Product Sensor and Other Applications)                                                           |
| Access and Control                                                                                                | GSM / GPRS Web Based Remote PC Access and Control Opportunity (Telemetry) – Optional                            |
| Power Saving Mode                                                                                                 | Reliable operation with product sensor, Low consumption with Continuous Power Saving mode                       |
| Mechanic                                                                                                          |                                                                                                                 |
| High data storage capacity with EEPROM setting, storing of statistics and LOG records in flash memory. (Optional) |                                                                                                                 |
| Fault - Log, record keeping feature                                                                               |                                                                                                                 |
| High performance microprocessor controlled MDB/ EXECUTIVE Protocol Support                                        |                                                                                                                 |
| Advanced hardware interfaces with MDB protocol                                                                    |                                                                                                                 |
| EEPROM (external socket)                                                                                          |                                                                                                                 |
| Software Update with Bootloader                                                                                   |                                                                                                                 |
| Connect to PC via Cable and Master-Slave Work with RS232 Interface · Optional                                     |                                                                                                                 |
| Function                                                                                                          |                                                                                                                 |
| Compatible with currencies of more than 200 countries                                                             |                                                                                                                 |
| High-quality advertising space with                                                                               |                                                                                                                 |
| Exclusive Rulomatik design.                                                                                       |                                                                                                                 |
| IP67 protection against water and dust.                                                                           |                                                                                                                 |
| LED lighting.                                                                                                     |                                                                                                                 |
| Software Update with Boot via USB or PC.                                                                          |                                                                                                                 |
| Use of ROHS compliant and Human Health Safe NSF Certified materials.                                              |                                                                                                                 |
| International norms, CE conformity and ISO 9001: 2008 QMS production standard.                                    |                                                                                                                 |

## Live Tracking

With the RULOCONTROL application, you can instantly monitor the instant status information of all Rulomatik automatic vending machines from anywhere and from any device with internet connection.

- Live tracking
- Vending machine tracking
- Mobile access support
- Report grouping
- History tracking records
- Real time activity management
- Local server support
- Remote automat controls
- Vending restrictions

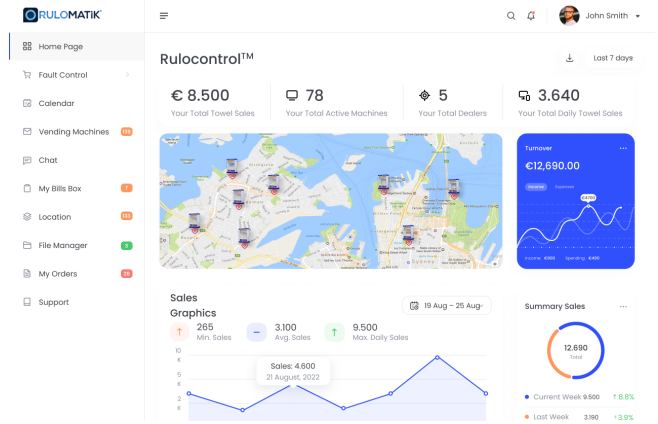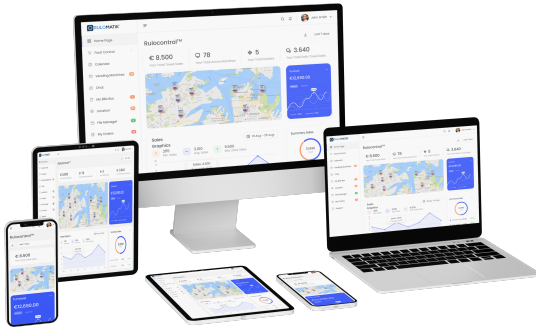

### Headquarters Address:

GOSAB, Dumlupınar Mahallesi Selçuk Caddesi No:1 16285 PK , Nilüfer Bursa, TR

### Contact Info:

+90 850 650 1111 Pbx , +90 224 443 0115 (Local Call)

info@rulomatikcompany.com - www.rulomatik.com



**LEGAL WARNING:** All information and related documents are believed to be accurate and the information is based on well-meaning and reliable sources. But Rulomatik does not make any representations, guarantees or commitments regarding this information. Accordingly, the companies or their members of the Board of Directors or their staff, consultants or employees shall be liable for any direct or indirect loss of a person / company as a result of any information or communication transmitted or not under the scope of this report is not responsible for the damage.